

3M™ Spraying Respirator Kit 7551, A1P2

Technical Data Sheet



Description

A convenient respiratory kit designed for certain painting* and spraying environments.

The kit comes complete with the 3M™ Half Face Reusable 7500 Series Respirator for comfort and durability. The 3M™ Cool Flow™ Exhalation Valve reduces breathing resistance and minimizes heat build-up.

Specifications

- Filter Rating: A1P2
- Provides protection against organic vapours with boiling point >65°C and particulates.
- Weight: 6051 = 100gm per filter (nominal)
6051/5925/501 = 115g (nominal)




Kit Contains

- 1 x 3M™ Half Face Respirator 7500 Series (available S, M & L sizes)
- 1 x pair of 3M™ Organic Vapour Filters 6051 A1
- 2 x pairs of 3M™ Particulate Filters 5925, P2
- 1 x pair of 3M™ Filter Retainers, 501
- 2 x 3M™ Respirator Cleaning Wipes 504
- 1 x 3M™ Respiratory Protection Guide
- All in a handy storage container

Applications

- Paint* spraying
- Pesticide spraying
- Chemical handling of organic vapours e.g. from thinners and adhesives
- Fibre glassing
- Printing
- Furniture manufacturing
- Possible to convert respirator to dual air supplied respirator system

NOTE: Gas/vapour cartridges do not filter particulates. If there is exposure to particulates use a combination of filters for protection. For example: fit the 3M™ Particulate Filters 5925 (P2) and the 3M™ Filter Retainer 501 over the gas/vapour cartridge to provide combined protection against dusts, mists and fumes as well as the rated gas/vapour (refer to picture below).

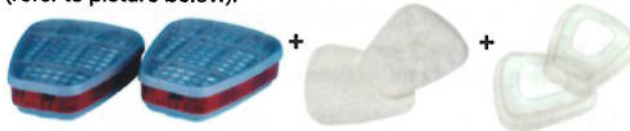

Standards

- Complies with AS/NZS 1716 (Respiratory protective devices).
- Use in accordance with AS/NZS 1715 (Selection, use and maintenance of respiratory protective equipment).

Technical Specifications

When selected and used in accordance with the standard (AS/NZS 1715) and for the contaminants specified, the Respirator Kit is capable of providing the following protection with a 3M Half Face Respirator 7500 Series:

- 3M™ Organic Vapour Filters 6051 A1, for concentrations of organic vapours with boiling points >65°C up to 10 x WES or 1000 ppm, whichever is lower.
- 3M™ Particulate Filters 5925, P2 for particles, for airborne concentrations up to 10 x WES.